

GRT III Trigger Installation

Installation is Shown on a Crosman Quest but Installation is the Same for Almost all Applications

The Final Clearance Check to be Performed on the Crosman Quest and the B-18/19's is Shown on the Final Page

Use the Left and Right Arrow Keys to Move Forward and Back Through the Slides

Pre-Installation Front Side



Pre-Installation Reverse Side



Remove e-clip From Trigger Pivot Pin



Start to Push Pivot Pin Out



Completely Remove Pivot Pin from Trigger Assembly



Pivot Pin Removed From Old Trigger with remaining e-clip still attached



Begin to Remove Old Trigger from Trigger Housing



Old Trigger Out



Depress Spring in Trigger and Slide Out Fat Trigger Pin



Fat Trigger Pin Out



Remove Old Adjustment Screw




Old Adjustment Screw Being Removed



Fat Trigger Pin in GRT III Trigger




Slide GRT III Trigger in Housing

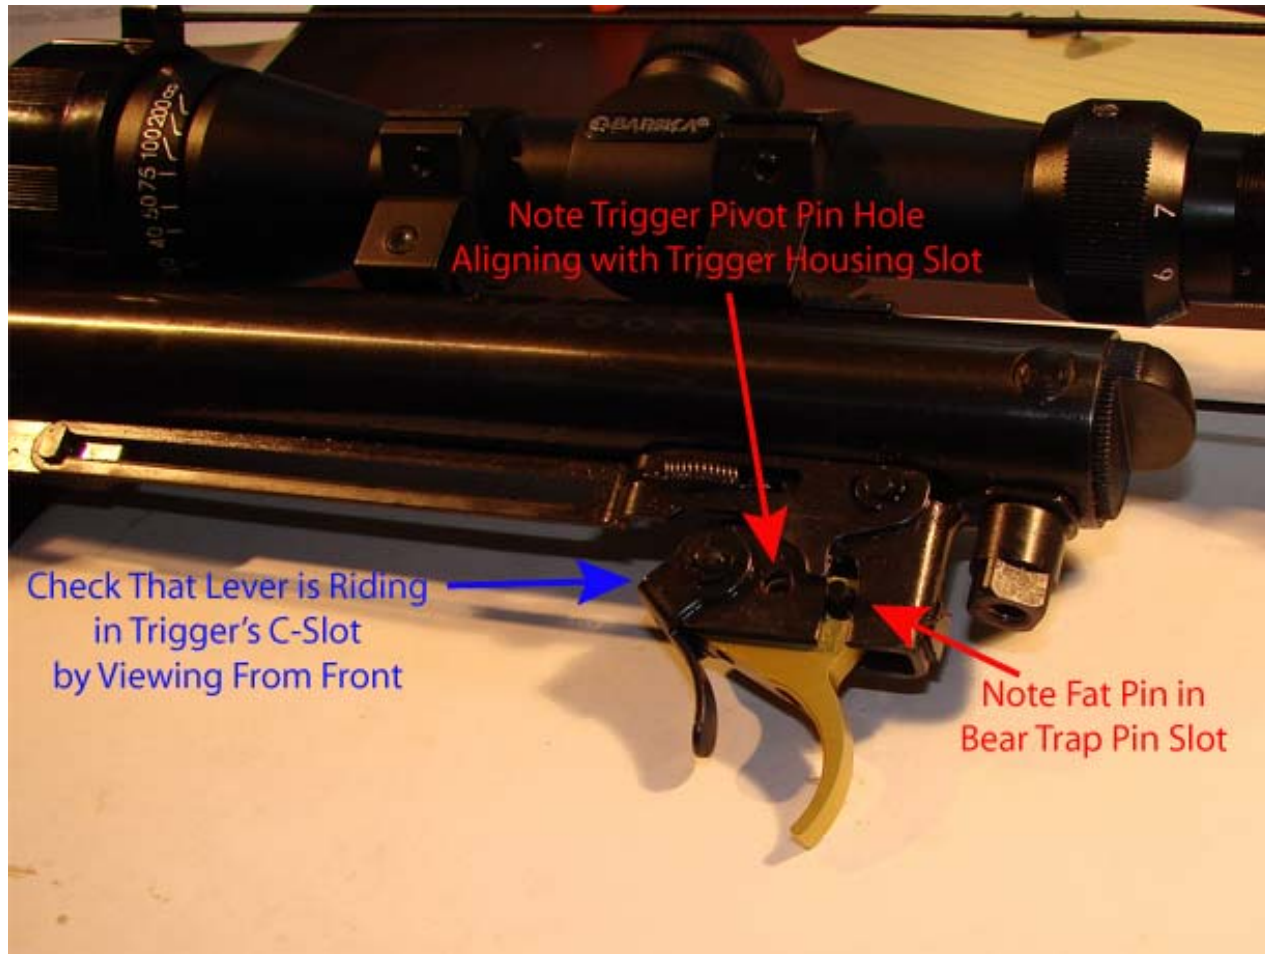

Pivot Pin Through Trigger Housing and Trigger



Replace e-clip on Trigger Pivot Pin

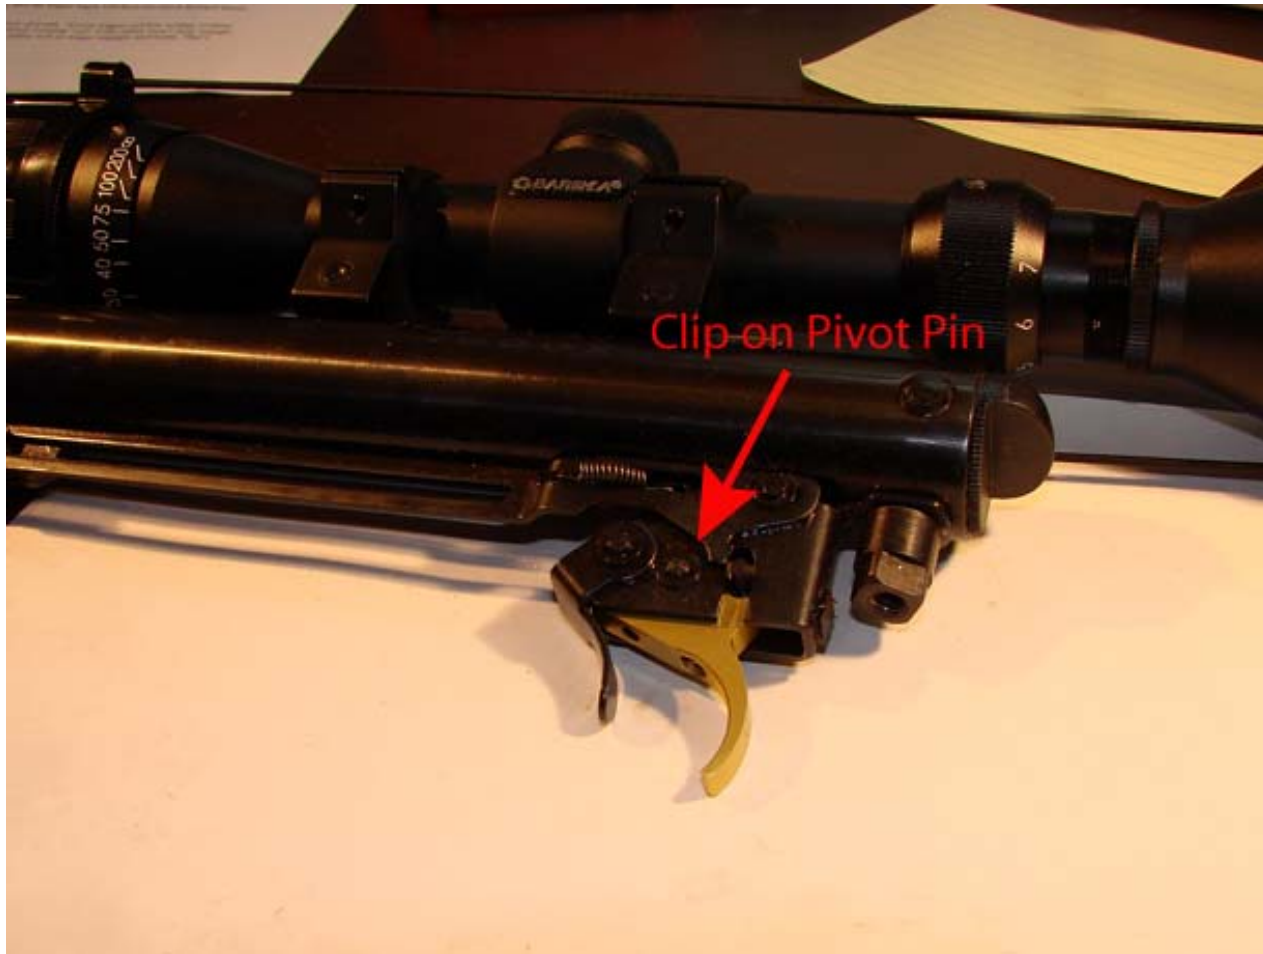

Installed



On Crosman Quest and B-18/19's Perform This Check for Clearance



Put Safety in Off (Fire) Position
and Pull Trigger Back to Check
for Clearance in This Area